

LH-CFL2

- GU24 THERMOPLASTIC LUMINAIRE
- 13W FLUORESCENT = 60W INCANDESCENT
- FITS BOTH 3 1/2" AND 4" CEILING BOXES

Luminaire Rated: 120V, 60Hz

Specifications:
Bulb Life: 10,000 Hours
Energy Used: 13Watts
Light Output: 800 Lumens
Lamp Color: 2700K


CF Lamp Contains Mercury (Hg)
Dispose of according to Local,
State and Federal Law
www.lamprecycle.org

**DO NOT USE WITH DIMMERS OR
OTHER CONTROL DEVICES
UNLESS THEY ARE LABELED AS
FLUORESCENT COMPATIBLE**

To be installed and/or used in accordance with
appropriate electrical codes and regulations.

FOR INDOOR USE ONLY

NOTE: Min 90°C
supply conductor

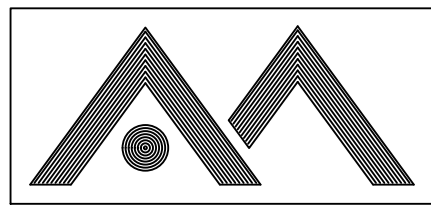


ALLIED
MOULDED
PRODUCTS, INC.

www.alliedmoulded.com
222 North Union St.
Bryan, OH 43506

Toll Free 800.722.2679

3 YEAR LIMITED WARRANTY
(DETAILS ENCLOSED)

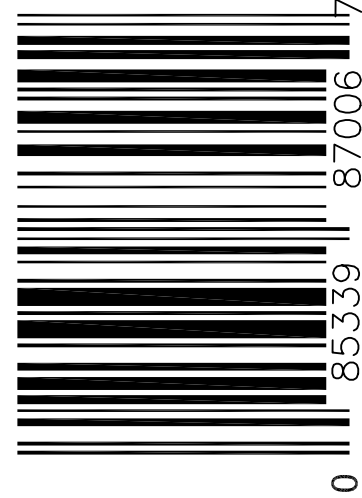

MADE IN CHINA

Important:
**Follow these instructions exactly
to maintain polarity of a correctly wired system**

CAUTION: Remove and install lamp with caution. Handle lamp on finger grips only.
DO NOT INSTALL OR REMOVE LAMP HOLDING THE GLASS PORTION OF THE
LAMP. RISK OF INJURY MAY OCCUR FROM BROKEN GLASS IF MISHANDLED

WARNING: TO AVOID FIRE SHOCK OR DEATH **TURN OFF POWER** AT CIRCUIT BREAKER
OR FUSE AND TEST THAT POWER IS OFF BEFORE WIRING.

NOT INTENDED FOR USE IN DAMP OR WET LOCATIONS.

TO INSTALL:

1. Remove lens and lamp before installation of the base.
 2. When mounting on a 3 1/2" (8.89cm) standard outlet box ONLY, break knockouts in mounting holes on base of luminaire. Not necessary when mounting to a 4" (10.16cm) box.
 3. Remove precut piece of insulation from wire to expose copper.
 4. Connect wires as follows: BLACK luminaire lead to outlet box LINE (HOT) and WHITE luminaire lead to outlet box NEUTRAL.
- NOTE:** connect each lead with wire connectors provided.
5. Mount luminaire to box using the screws provided.
 6. Install lamp by pushing in and twisting until lamp locks into place.
 7. Install lens by pushing lens on and twisting until it locks into place under the tabs.
 8. Turn power back on.

3 YEAR LIMITED WARRANTY LH-CFL PRODUCTS

Allied Moulded Products, Inc. warrants the Compact Fluorescent Luminaire light fixture products to be free from defects in materials and workmanship for a period of 3 years from the date of original purchase by the consumer. In the unlikely event an Allied Moulded CFL light fixture product fails to perform as it was designed in an application it was intended for within 3 years from the date of purchase, we will repair or replace (at our option) the unit in its original design or a similar design if the item has been discontinued, without charge. Call us at (800-722-2679) to obtain a Return Authorization number and an address where to ship your defective product. Defective units must be properly packed and returned to Allied Moulded Products, Inc. (prepaid) with a letter of explanation and original purchase receipt showing the date of purchase.

LH-CFL2

- GU24 Luminaire termoplástico
- 13W FLUORESCENT = 60W INCANDESCENT
- LOS ATAQUES AMBOS 3 1/2" y 4" CAJAS DE TECHO

Luminaire Tasada: 120V, 60Hz

Especificaciones:
Vida de bombilla son 10,000 horas
Energía usada: 13 Vatios
Salida de luz de bombilla: 800 lumens
Color de Lámpara: 2700K

CF La lámpara contiene mercurio (Hg)
Elimine según local
Estado y Federal Ley
www.lamprecycle.org




**NO UTILIZAR CON
REGULADORES DE INTENSIDAD O
DE OTROS DISPOSITIVOS DE
CONTROL A MENOS QUE SE
ETIQUETAN COMO
FLUORESCENTES COMPATIBLES.**

PARA USO DE INTERIOR SÓLO

Ser instalado o usado de acuerdo con
asigne códigos eléctricos y regulaciones.

Note: Min 90°C conductor de suministro

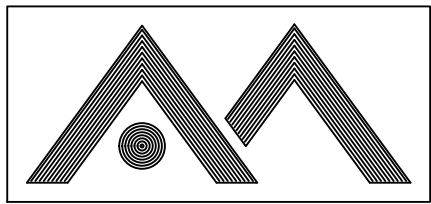

ALLIED
MOULDED
PRODUCTS, INC.

www.alliedmoulded.com
222 North Union St.
Bryan, OH 43506

Toll Free 800.722.2679

3 AÑO LIMITÓ DE GARANTÍA
(Detalles Incluidos)

3 AÑO LIMITÓ PRODUCTOS DE LH-CFL DE GARANTÍA

Allied Moulded Products, Inc garantiza los productos de encuentro de luz de Luminaire fluorescentes compactos para ser libre de defectos en materiales y habilidad para el periodo de 3 años de la fecha de la compra original por el consumidor. En el acontecimiento improbable un producto de encuentro de luz de Allied Moulded CFL deja de funcionar cuando fue diseñado en una aplicación fue querido para dentro de 3 años de la fecha de la compra, repararemos o sustituiremos (a nuestra opción) la unidad en su diseño original o un diseño similar si el artículo ha sido discontinuado, sin el precio. Llámennos en (800-722-2679) para obtener un número de Autorización de Vuelta y una dirección donde transportar su producto defectuoso. Las unidades defectuosas deben ser correctamente embaladas y devueltas al Allied Moulded Products, Inc (pagado por adelantado) con una carta de explicación y recibo de compra original mostrando a la fecha de compra.

Importante:
**Siga éstos instrucciones exactamente mantener
polaridad de un sistema correctamente conectado**

PRECAUCIÓN: Quite e instale la lámpara con la precaución. Agarra la lámpara con sus dedos solo. NO INSTALE O QUITE LÁMPARA QUE SOSTIENE LA PARTE DE CRISTAL DE LA LÁMPARA. ARRIESGUE O LA HERIDA PUEDE OCURRIR DEL CRISTAL ROTO DE SER MANEJADO MAL.

ADVERTENCIA: EVITAR CHOQUE DE FUEGO O MUERTE **APAGAN PODER EN** CORTACIRCUITOS O FUSIBLE Y PRUEBA QUE EL PODER ES LEJOS ANTES DEL ALAMBRADO.

NO DESTINADO PARA EL USO EN UBICACIONES HÚMEDAS NI MOJADAS.

INSTALAR:

1. Quite la lente y la lámpara antes de la instalación de la base.
 2. Montando en 3 1/2" armario de distribución estándar (de 8.89 cm) SÓLO, golpes de gracia de ruptura en montaje de agujeros en base de luminaire. No neccessary montando a una 4" caja (de 10.16 cm).
 3. Quitar el pedazo de precorte del aislamiento del alambre para exponer el cobre.
 4. Unen alambres como sigue: el plomo de luminaire NEGRO A LA LÍNEA de armario de distribución luminaire (CALIENTE) Y BLANCA conduce al armario de distribución NEUTRO.
- Note:** una cada plomo con conectores de alambre provided
5. Luminaire de montaje para poner en una caja utilización de los tornillos proporcionados.
 6. Instalar la lámpara empujando en y enroscándose hasta cerraduras de lámpara en el lugar.
 7. Instale la lente empujando la lente en y enroscándose no antes de que esto se cierre en el lugar bajo las etiquetas.
 8. Encienda el poder

HECHO EN CHINA