



## Empire Series: Free Standing Single Door



### APPLICATION

- Designed to insulate and house electrical and electronic controls, instruments or components for indoor and outdoor applications
- Especially well suited for high temperature or corrosive environments
- Protects from dirt, dust, oil and water

### STANDARDS

- UL Types 1, 4, and 4X
- CSA Types 1, 4, and 4X
- NEMA Types 1, 4, and 4X
- IEC 60529 Type IP66

### CONSTRUCTION



- Durable, corrosion resistant Ultraguard® fiberglass material construction
- Soft, self-gripping gasket compresses over flange for tight seal and has one 3 point latching handle with padlocking provision
- Heavy-duty continuous 304 stainless steel hinge
- Ultraguard® fiberglass material has UV inhibitors which provide ideal protection from outdoor weathering
- Heavy duty lifting eyes
- Molded-in drip shield

### ACCESSORIES

- Optional painted carbon steel back panels
- Optional thermal management products (See pages 102-103.)
- Optional print pocket

### MODIFICATIONS

See page 106

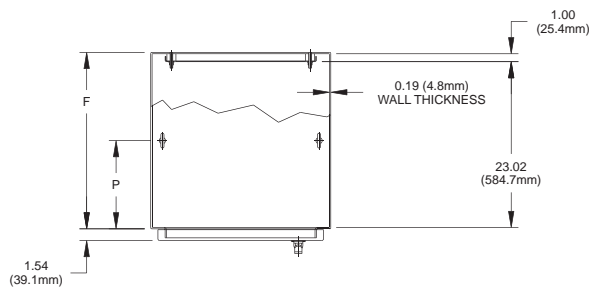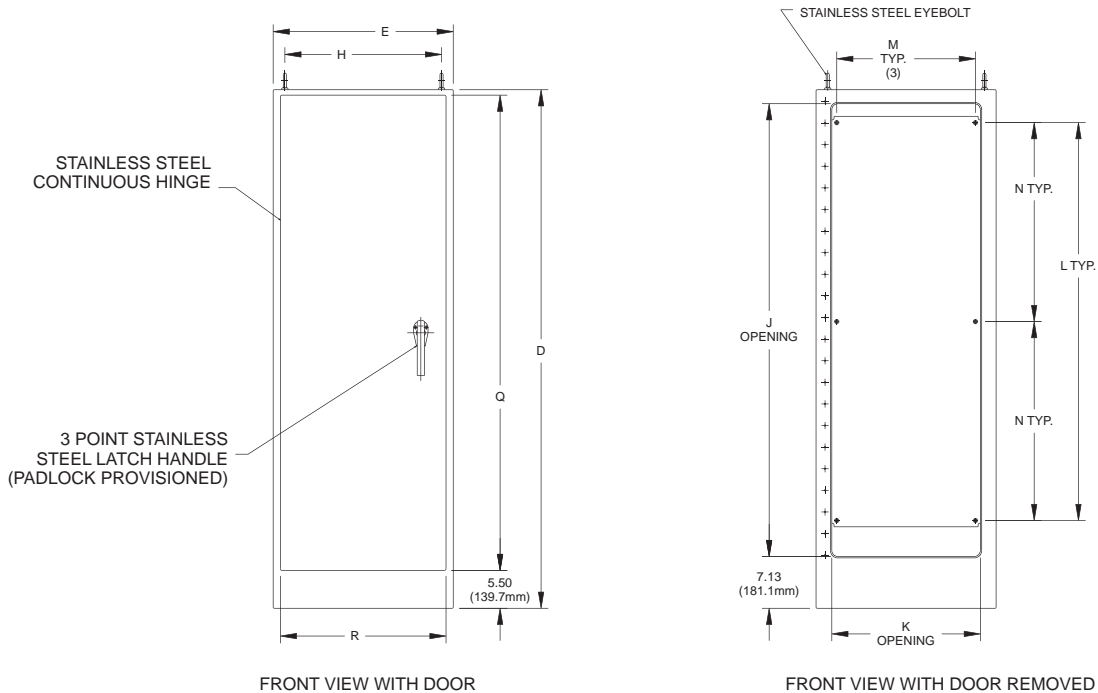

Part No.	D	E	F	H	J	K	L	M	N	P	Q	R	# PANEL MOUNT STUDS
AM722525FS	72.00 1829mm	25.00 635mm	24.50 622mm	21.75 552mm	62.88 1597mm	20.63 524mm	55.25 1403mm	19.25 489mm	27.63 702mm	12.25 311mm	66.00 1676mm	23.00 584mm	6

All dimensions are in inches unless otherwise noted.

Optional Carbon Steel Back Panel		
Part No.	Height	Width
P7225CS	57.00 1448mm	21.00 533mm

EMPIRE SERIES



Order Today: 419-636-4217, Fax: 419-636-2450, e-mail: sales@alliedmoulded.com