



## Empire Series: Free Standing Double Door



### APPLICATION

- Designed to insulate and house electrical and electronic controls, instruments or components for indoor and outdoor applications
- Especially well suited for high temperature or corrosive environments
- Protects from dirt, dust, oil and water

### STANDARDS

- UL Types 1, 4, and 4X
- CSA Types 1, 4, and 4X
- NEMA Types 1, 4, and 4X
- IEC 60529 Type IP66

### CONSTRUCTION


- Durable, corrosion resistant Ultraguard® fiberglass material construction
- Flexible, self-gripping gasket compresses over flange for tight seal and has two 3 point latching handles with padlocking provision
- Heavy-duty continuous 304 stainless steel hinge
- Ultraguard® Fiberglass material has UV inhibitors which provide ideal protection from outdoor weathering
- Heavy duty lifting eyes
- Molded-in drip shield
- Fiberglass mounting strut installed on side

### ACCESSORIES

- Optional painted carbon steel back panels
- Optional thermal management products (See pages 102-103.)
- Optional print pocket

### MODIFICATIONS

See page 106

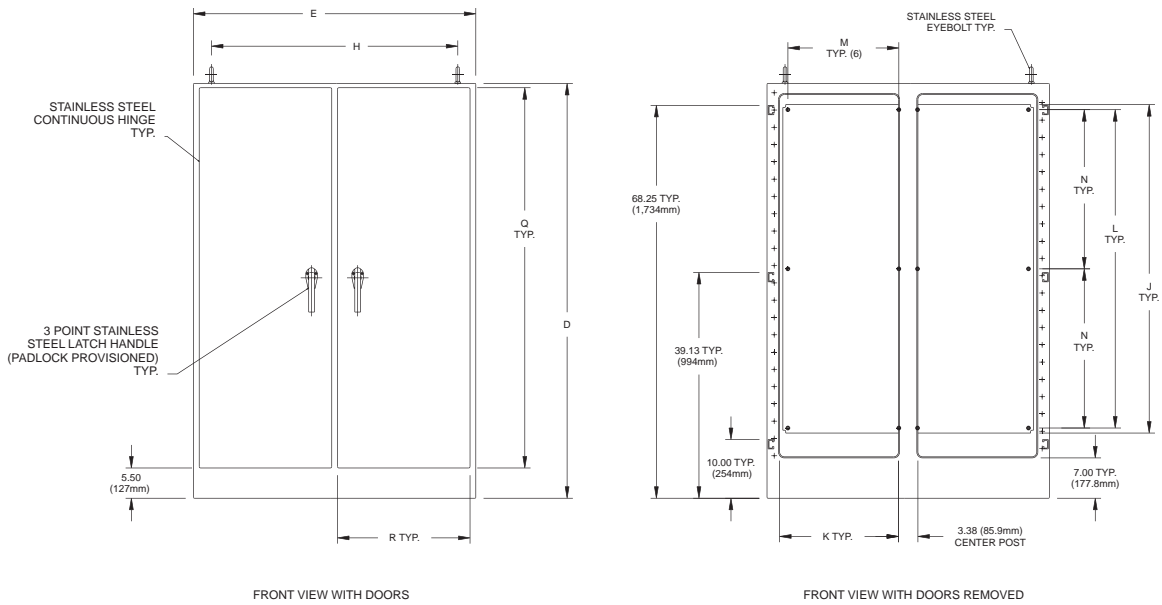

Part No.	D	E	F	H	J	K	L	M	N	P	Q	R	# PANEL MOUNT STUDS
AM724925FSDD	72.00 1829mm	49.00 1245mm	24.50 622mm	45.25 1149mm	62.88 1597mm	20.63 524mm	55.25 1403mm	19.25 489mm	27.63 702mm	5.00 127mm	66.00 1676mm	23.00 584mm	12

All dimensions are in inches unless otherwise noted.

Optional Carbon Steel Back Panel		
Part No.	Height	Width
P7249CS	57.00 1448mm	21.00 533mm



Order Today: 419-636-4217, Fax: 419-636-2450, e-mail: sales@alliedmoulded.com