



AMU Series: Patented* Mounting System

* US Pat. # 7,572,975

Innovative Design Features

Out-of-the-box Flange Design

- Flanges are installed at the factory with a high-strength adhesive and 300 series stainless steel screws
- Flange mount hole patterns match “VJ”, “J” and “A” series competitive foot prints
- Durable polycarbonate flanges withstand cracking during wall mount assembly
- Flanges act as an enclosure pad on uneven surfaces without allowing it to be drawn down and bind, or to crack
- Flange pads also allow air space between the enclosure and a warm machine or mounting wall
- To order, add an “F” to the base model (i.e. AMU1084F)




Multi-Directional Foot Mount Design

- Capable of mounting vertically or horizontally
- Durable polycarbonate feet withstand cracking during wall mount assembly
- Feet are shipped 4 per bag along with 300 series stainless steel screws
- Feet act as an enclosure pad on uneven surfaces without allowing it to be drawn down and bind, or to crack
- Foot pads also allow air space between the enclosure and a warm machine or mounting wall
- Feet come standard with the base model (i.e. AMU1084)
- Feet must be field installed per specific application requirements



Molded-In Mounting Dimensions

- Mounting dimensions are molded on the back of each ULTRALINE® enclosure
- Drawings detail the mounting hole patterns for flanges, vertical foot mount and horizontal foot mount options

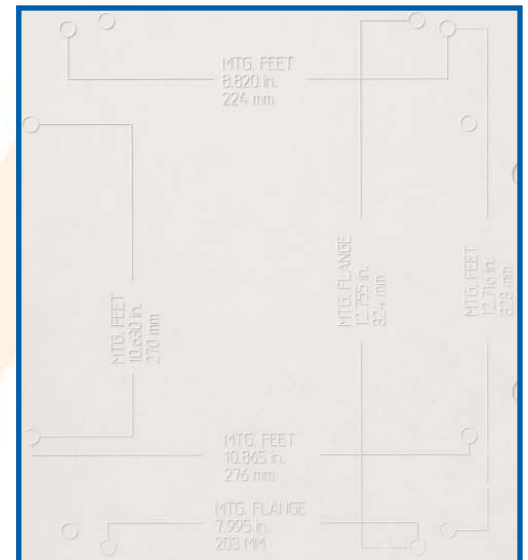

222 North Union Street • Bryan, Ohio 43606
(419) 838-4217 • Fax (419) 838-2450
<http://enclosures.alliedmolded.com>



ALLIED
MOULDED
PRODUCTS, Inc.