





ALLIED  
MOULDED  
PRODUCTS, Inc

# Allied Moulded's 5-in-1 Wall Box Solution

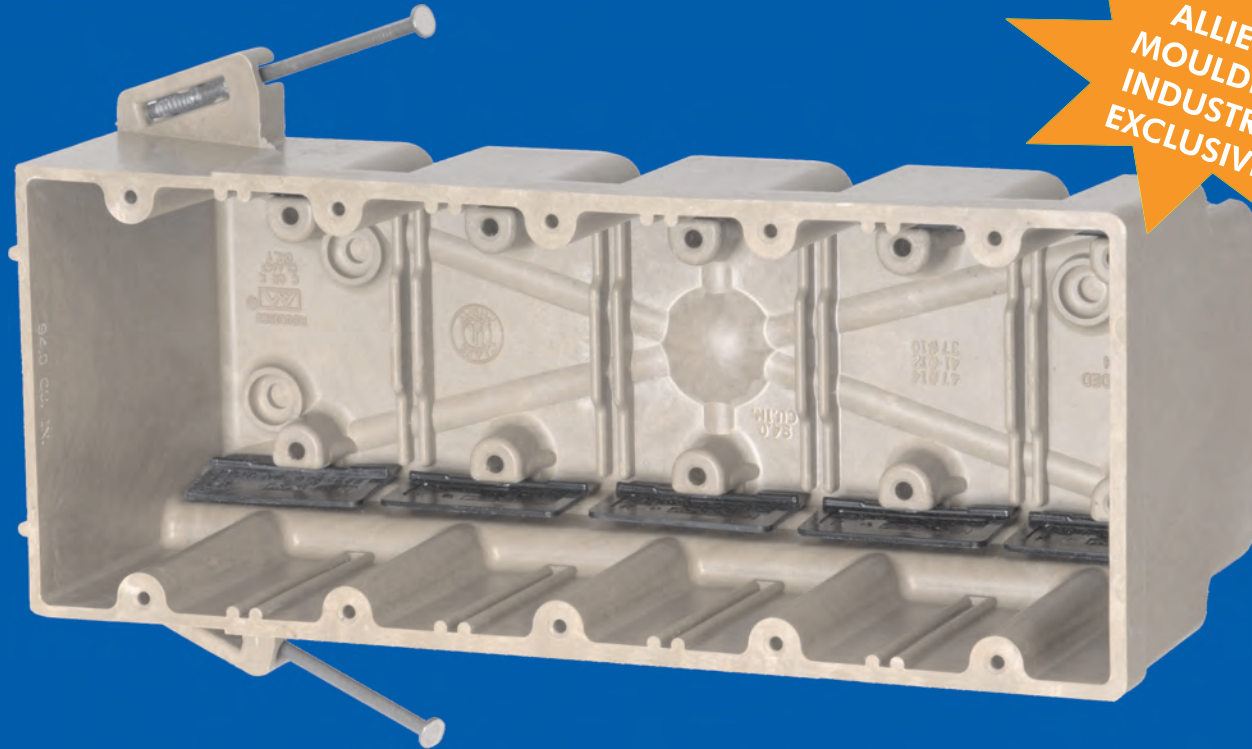

ALLIED  
MOULDED  
INDUSTRY  
EXCLUSIVE

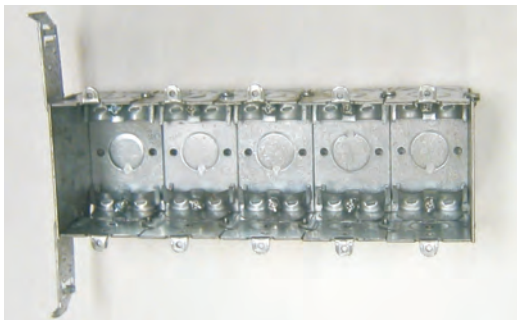


Allied  
Moulded's  
new 5-gang  
fiberglass  
switch box  
eliminates  
the need for  
high cost,  
labor intensive  
gangable box  
assembly.

#### 5305 Wall Box Features:

- 3 <sup>9</sup>/<sub>16</sub>" D x 9 <sup>5</sup>/<sub>16</sub>" W x 3 <sup>3</sup>/<sub>4</sub>" H
- Extra deep 94.0 cu. in. capacity but still fits in a 2 x 4 wall cavity.
- Strong and sturdy fiberglass construction that will not warp or distort
- Machine tapped holes for quicker installation and less chance of device screw pullout/strip-out.
- Available as: Standard nail-on, Nail-on with stabilizing bar, and Face bracket mount with stabilizing bar
- Industry Exclusive non-metallic Speed "k" Klamps™
- UL® 2-hour firewall classification
- Optional low voltage partition available for combined line and low voltage applications
- Accepts #14-2 through #10-3 with ground non-metallic sheath cable

# Five Gang Wall Boxes



Series 5305-N	Cu. In. Volume	Catalog Number	Component Description	D	W	H	UPC# 85399	Pkg. Qty.	Pkg. Wt. (lb.)
	94.0	5305-NK	Angled mid-nails, Speed Klamps™-factory installed	3 9/16	9 1/4	3 3/4	18001	6	8

Series 5305-NB	Cu. In. Volume	Catalog Number	Component Description	D	W	H	UPC# 85399	Pkg. Qty.	Pkg. Wt. (lb.)
	94.0	5305-NBK	Angled mid-nails, adj. stabilizing bar, Speed Klamps™-factory installed	3 9/16	9 1/4	3 3/4	18002	6	10

Series 5305-Z4B	Cu. In. Volume	Catalog Number	Component Description	D	W	H	UPC# 85399	Pkg. Qty.	Pkg. Wt. (lb.)
	94.0	5305-Z4BK	1/2" offset, "Z" hanger, adj. stabilizing bar, Speed Klamps™-factory installed	3 9/16	9 1/4	3 3/4	18003	6	11

Note: Other parts available but not stocked:

**5305-2Z4K**; 1/2" offset, "Z" hanger, each side of the box, Speed Klamps™-factory installed



## 5305 Product Features

### WALL BOX FEATURES

- Strong and sturdy fiberglass construction that will not rack (warp/distort) during installation
- Patented non-metallic Speed "K" Klamps™ for secure and dependable clamping of non-metallic sheath cable
- Machine tapped holes for quicker installation and less chance of device screw pullout/strip-out
- UL® 2-HR firewall classification

### OTHER WALL BOX FEATURES

- 5305 wall box will accept LVP-1 Low Voltage Partition for applications with combined line and low voltage requirements



Note: LVP-1 low voltage partition must be ordered separately.