


INDUSTRY EXCLUSIVE
FIRE RATINGS
FROM ALLIED MOULDED PRODUCTS

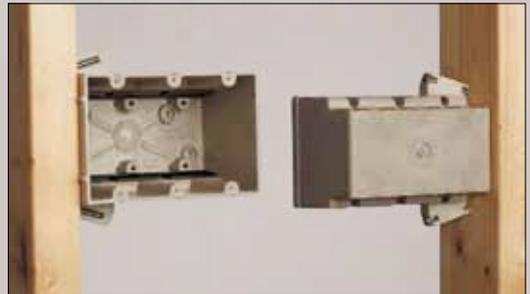

Fiberglass Ceiling boxes

Can be placed 5-1/2" (measured from box center to box center) from each other in solid wood or pre-engineered wood joist fire resistive assemblies.

Paragraph 5 UL® CEYY.R9379 Listing

Fiberglass Wall boxes

Can be mounted with 3" horizontal separation in all U-300 series walls with no additional insulation or putty pads.

Paragraph 2 UL® CEYY.R9379 Listing



**ALLIED
MOULDED
PRODUCTS, Inc.**

222 North Union Street
Bryan, Ohio 43506
t: (419) 636-4217
f: (419) 636-2450

www.alliedmoulded.com

